
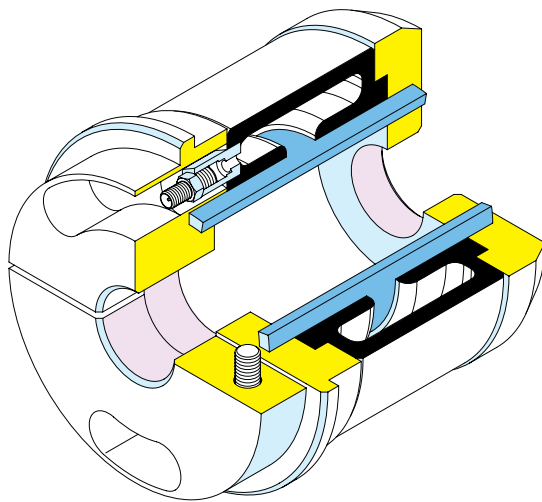


# AIR CHUCKS WITH RUBBER CASING

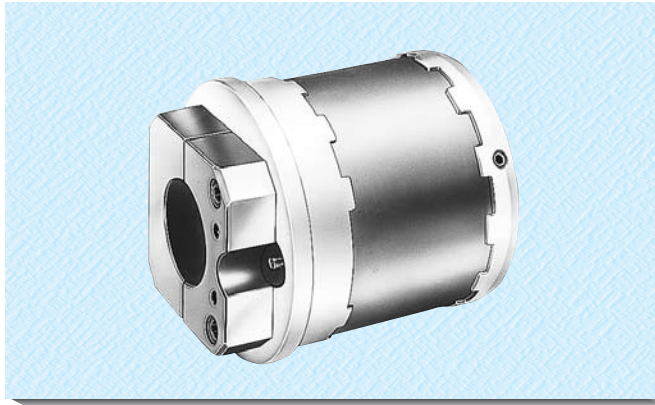

The 715/PG air chuck is recommended for unwinding and rewinding with cores. The body of the chuck can be either light alloy or steel, whereas the expanding section is made of a high-resistance rubber band. It is available with side flange for mobile arms unwind stand mounting, or with a passing bore for passing bars mounting. The steel clamp grants a perfect gripping onto the bar and can be replaced with fixing grains to reduce down the weight.

To get better performances in load capacity and transmissible torque, two or more 715/PG chucks can be connected in series and fed by one inflation air valve. Expansion is accomplished by one only rubber band which once inflated exerts a direct pressure onto the core.

Standard sizes available for this Model are listed below, but are available in other sizes for a custom order. Contact your SVECOM representative for details.

### TECHNICAL FEATURES\*

Core diameter	from 70 to 400 mm
Rubber tyre length	approx.-ca. 90 mm
Expansion range	12 mm
Air pressure	min. 5 bar (vorgeschlagen 6 bar)



Core diameter in mm	70/76	100	120	150	200
Max. torque in Nm with cardboard cores	90	280	470	620	1420
Max. torque in Nm with steel cores	140	340	530	760	1560
Max. carrying capacity in N	2000	3000	4000	6500	8000

\*Contact your SVECOM representative for Non-Standard requirements.